


Understanding the blocks

For this project, we will use four main blocks:

- **spi_ctrl:** Controls SPI communication with the accelerometer.
- **acc_controller:** Processes data read from the sensor.
- **twos_complement_to_ascii:** Converts data to ASCII.
- **uart_tx:** Transmits data via UART.

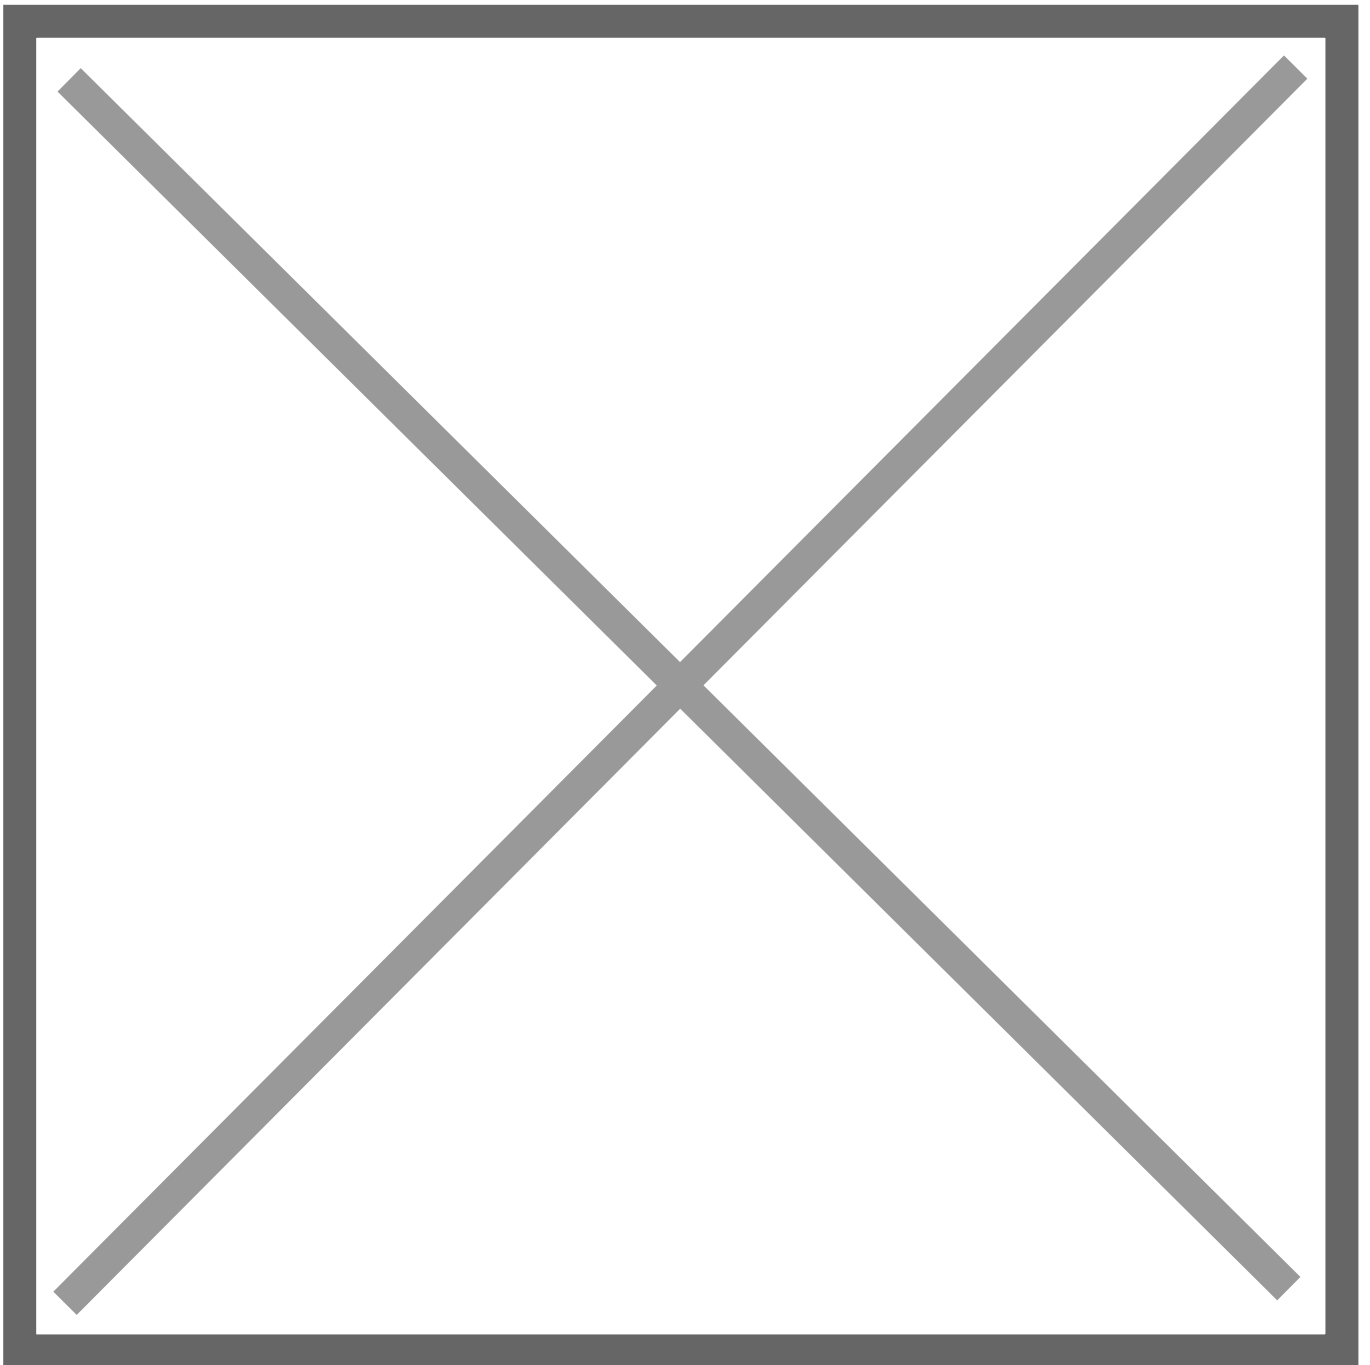

Revision #2

Created 3 April 2025 17:26:29 by Caroline

Updated 3 April 2025 17:31:55 by Caroline