


Viewing the Project in 3D

1. On the top navigation bar, navigate to the View tab and select Interactive 3D Layout.

2. Use the controls to explore the layout:

- **Rotate:** Click and drag with the left mouse button.
- **Zoom:** Use the mouse scroll wheel.
- **Pan:** Press Ctrl + left mouse button or right mouse button to reposition the layout.

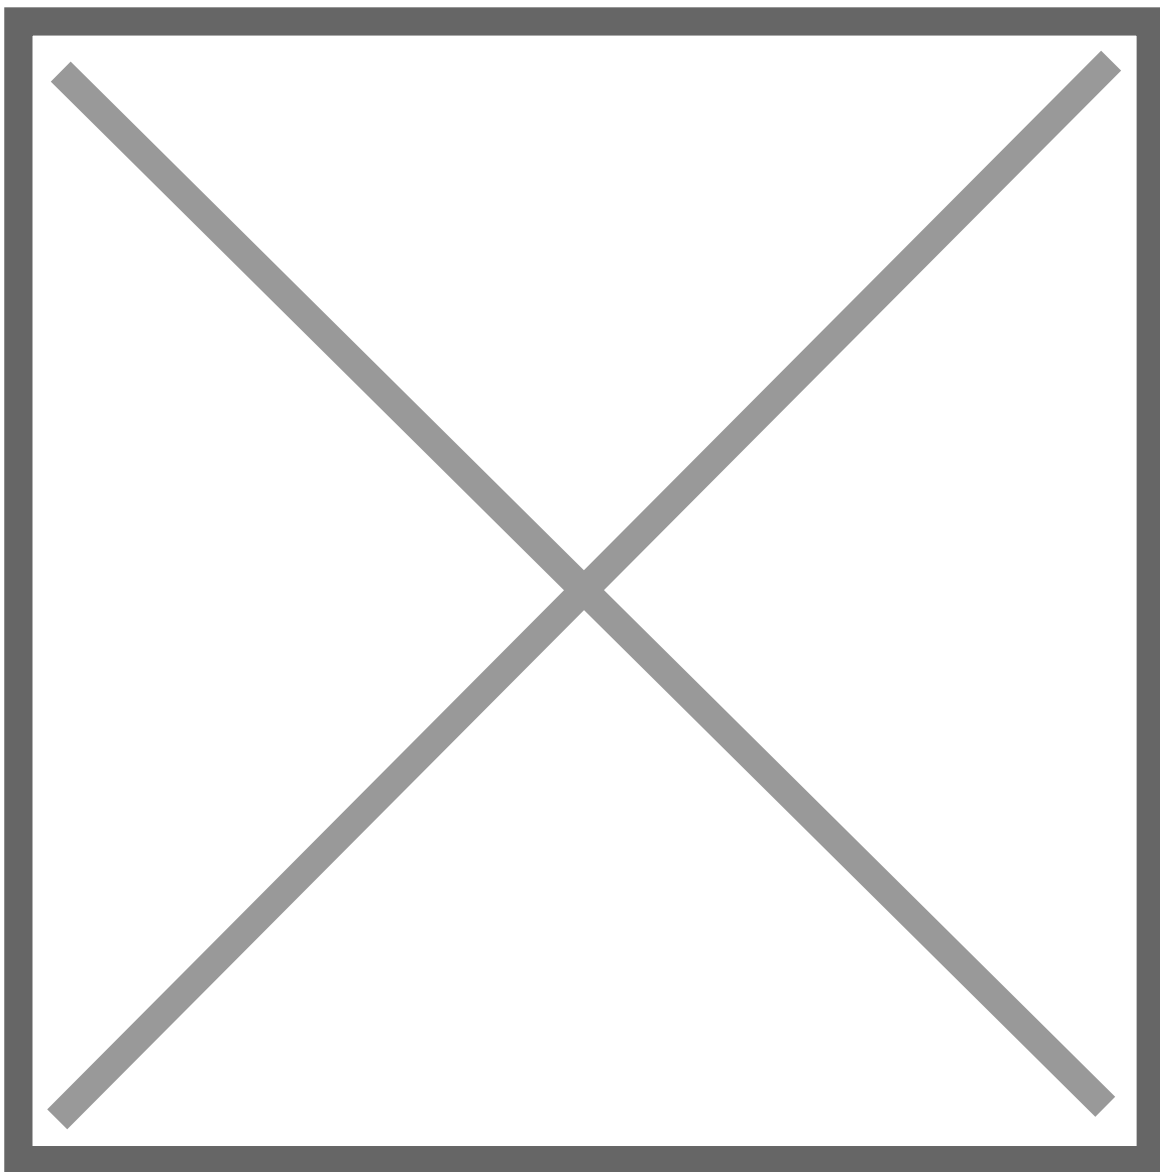

3. Filter Layout Elements

The layout includes several visualization options to help focus on specific elements:


- Toggle Filler Cells: Hide non-functional elements like filler cells.
- Toggle TopCellGeometry: Remove power and ground buses from the view.
- Toggle Instance Labels: Show or hide labels for individual components.
- Toggle Net Connections: Highlight the connections between components.

These options allow for a cleaner and more focused view of the circuit, depending on what you wish to analyze.

4. Isolating Specific Cells

To focus on a particular component, use this feature to analyze specific parts of the circuit in detail:

- Hover the mouse over the desired cell, and then:
- The first option is to click on it to isolate the component, filtering out unrelated elements, in the right bar, using the filter layout elements.
- The second option is to click on the buttons 1, 2 and 3 on your keyboard, with the mouse over the desired cell. Click 3 again to visualize the whole chip again.

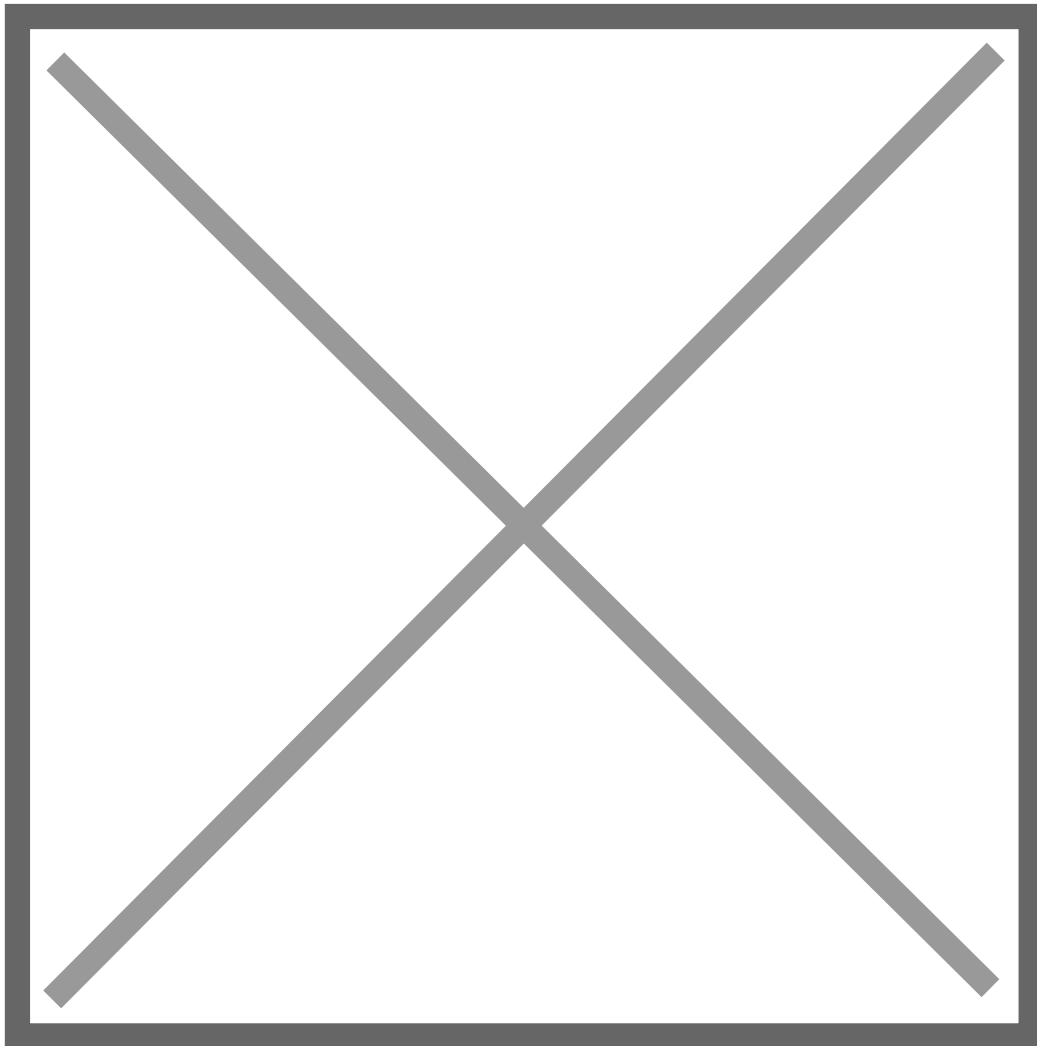

Revision #3

Created 18 February 2025 17:29:17 by Caroline

Updated 18 February 2025 19:56:39 by Caroline